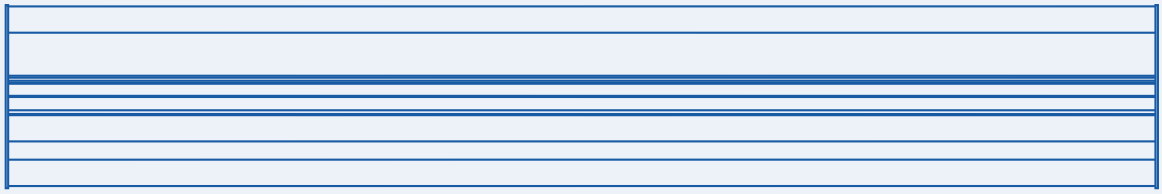

SB SURFACE DATA TRACK

ELECTRICAL	
Rated Voltage	250V a.c. Single-phase
Rated Current	40Amp maximum
Frequency	50Hz / 60Hz
Conditional Short Circuit Rating	(MCB: In:40A Ue:400V), Type B (BS EN 60898-1) Prospective current: 6KA (BS EN 60439-2)
Conductor Resistance Line & Neutral	4.4 mohm/meter run
Conductor Impedance	4.5 mohm/meter run
Voltage drop: Line & Neutral Line & Earth	4.5 mV/A/meter run 2.73 mV/A/meter run
Rated Impulse Withstand Voltage	4000V a.c.
Connection of Adaptor or Tap-off Unit	Intended to be connected and disconnected when system is energized and with a load connected
Terminal Connecting Capacity: Live, Neutral & Earth	4.0 mm^2 to 10 mm^2
Data Compartment Capacity (applicable to data tracks only)	Design to accommodate 4 x Cat5e data cables Design to accommodate 3 x Cat6 data cables
EMC Screening	Provide an effective screen for computer service cables
ENVIRONMENTAL	
Ambient Operating Temperature	-5°C to +40°C (not to exceed an average of more than 35°C in any 24 hours period)
Maximum Installation Altitude	2000 meters
Resistance to Impact	Heavy Impact
Degree of Protection	IP4X
Degree of Pollution	2 (Non-conductive pollution with temporary conductivity caused by condensation)
MATERIAL	
Track Material	Aluminium
Insulation Material	Polycarbonate
SIZE AND WEIGHT (Based On 1meter Length)	
Overall Dimension (Height x Depth x Width)	104mm x 27mm x 1000mm
Weight	Estimated 2.5 kilograms
Compliance	GOST.R certified IEC 61534-1:2003 / EN 61534-1
Guarantee	3 years subject to Eubiq Limited Warranty Statement

eubiq™ GSS™ | www.eubiq.com

EUBIQ PRIVATE LIMITED. 9 JOO KOON CRESCENT SINGAPORE 629025
ALL RIGHTS RESERVED. EUBIQ AND GSS ARE REGISTERED TRADEMARKS OF EUBIQ PTE LTD.

DISCLAIMER: EUBIQ PRIVATE LIMITED RESERVES THE RIGHT TO ALTER ANY DETAILS OF SPECIFICATIONS OR EQUIPMENT WITHOUT PRIOR NOTICE. DETAILS OF SPECIFICATIONS AND EQUIPMENT ARE ALSO SUBJECTED TO CHANGES TO SUIT LOCAL STANDARDS, CONDITIONS AND REQUIREMENTS. PLEASE CONSULT YOUR LOCAL DEALER FOR MORE INFORMATION OR LOGON TO EUBIQ WEBSITE.

DMK-004-002-01